

```
SOURCE CODE: x = c(12,13,14,12,12) y = c(7,5,34,2,42) # first plot jpeg(file="test1.jpg") hist(x,col=2)
dev.off() # second plot jpeg(file="test2.png") plot(x,y) dev.off()
```

Comprobando el fichero de configuracion

Fichero R generado


```
R CONSOLE COMMAND: c:/R-2.3.0/bin/Rterm.exe --quiet --no-restore --no-save < tmp/gfz6v76x1y.R
```

```
> tmp/gfz6v76x1y.Rout
```


Output of R program

---

```
> x = c(12,13,14,12,12)
> y = c(7,5,34,2,42)
> # first plot
> jpeg(file="tmp/9gue")
> hist(x,col=2)
> dev.off()
```

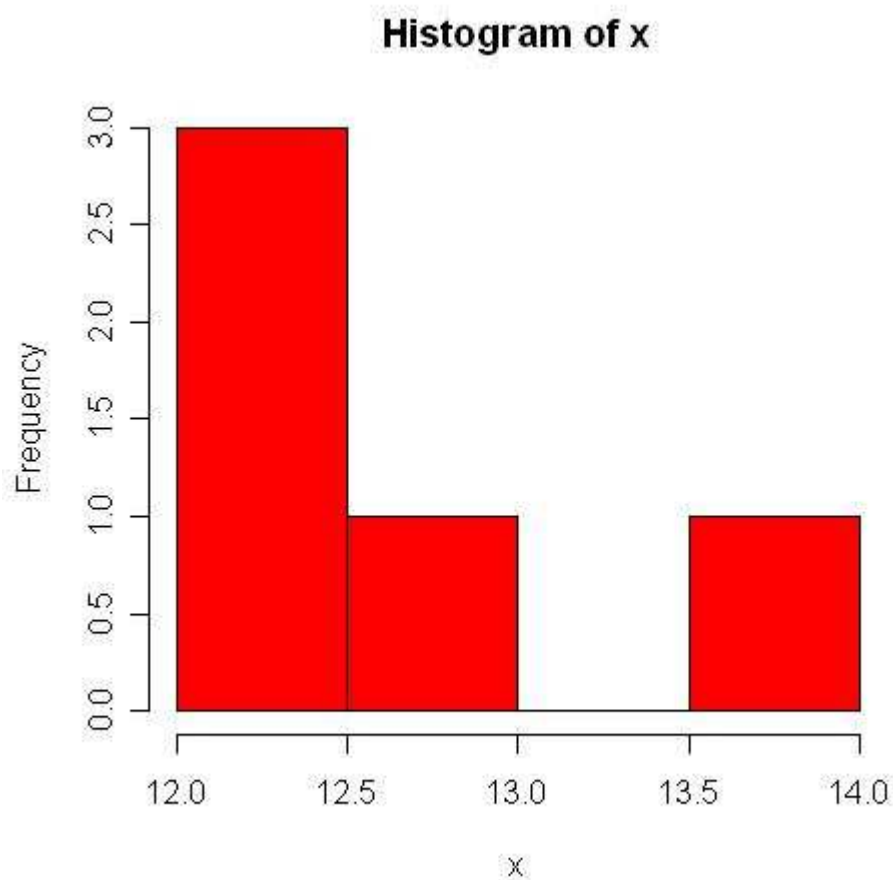

```
> # second plot
> jpeg(file="tmp/lezl")
> plot(x,y)
> dev.off()
```

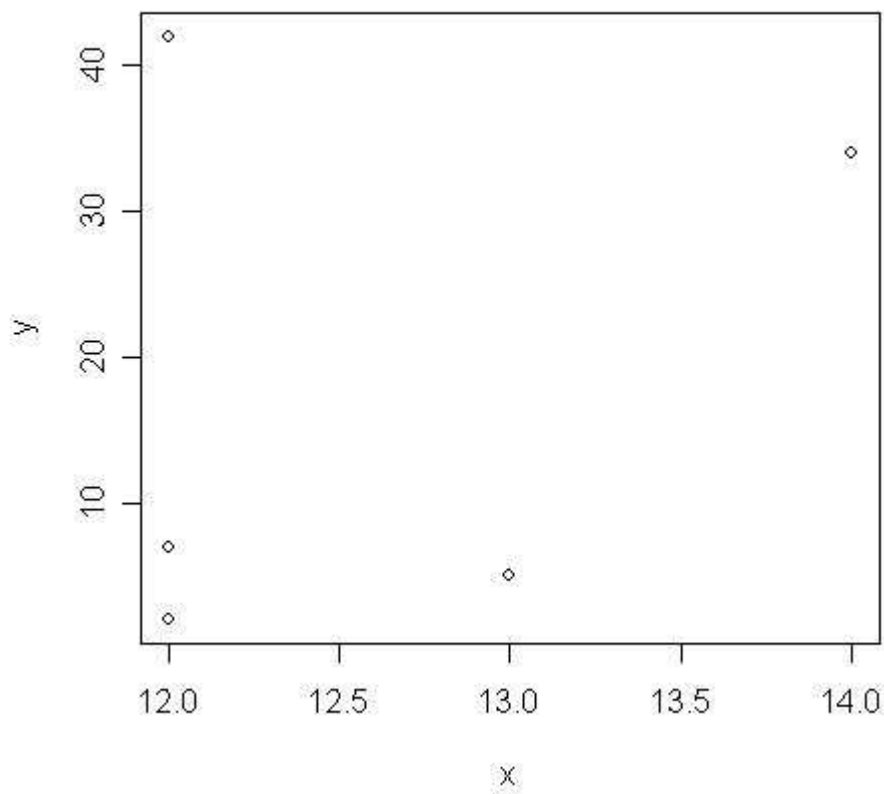

>